



Pre-form bases

Level entry | Solutions for Timber Floors Centre Drain





Oben History

Since 1923 Oben's family founders have been passionate about creating the perfect bathroom a place where water and wonderful ideas flow together in endless expressions of innovation, indulgence and design.

For over 95 years this proud family-owned business has dedicated itself to being first with the future and second-to-none with everything else!

It's an attitude that has made it an undisputed market leader and earned it an envied international reputation as a modern day pioneer of bathroom and showering technology.

Oben's innovative shower products are built with the same solidity, durability and quality as their reputation so that you may enjoy the pleasure of their performance and beauty of their designs for many years to come.



Derek Englefield

Managing Director



Contents

| J-Walk In Shower - Curved | 6 - 7 |
|--------------------------------------|---------|
| Walk-In Shower - Flat | 8 - 9 |
| Rectangular Corner Showers | 10 - 11 |
| Square Corner Showers | 12 - 13 |
| Alcove Showers | 14 - 15 |
| Neo-Angle Showers | 16 - 17 |
| Shower Niches/Foot Rest | 18 - 19 |
| Glide Glass® Easy Clean Glass | 20 |
| Product Finishes | 21 |
| Rock-Stone® Base Features & Benefits | 22 - 23 |
| Rock-Stone® Base Installation | 24 - 25 |
| Shower Niche Technical | 26 |
| Oben PVC Drains Technical | 27 |
| Oben Installation Services | 28 -29 |
| Custom Base Order | 30 - 31 |
| Base & Enclosure Technical - Corner | 32 - 33 |
| Base & Enclosure Technical - Alcove | 34 - 35 |
| F.A.Q.s | 36 - 37 |


New build or renovating

It's never been easier

to create a Level Entry Shower

with Oben wafer®

Oben makes it easy

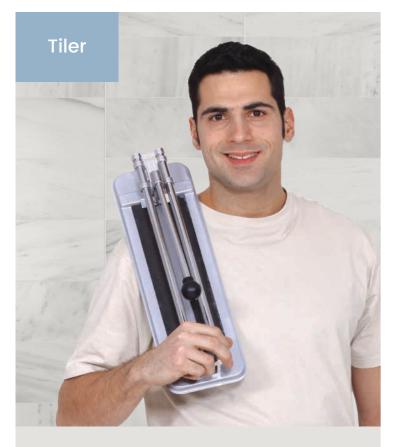

"Oben makes it easy for me to create an exquisite tile shower, every time"

Oben technology - everything a tiler could wish for


- 100% Waterproof shower base system
- Pre-formed slopes guarantee drainage
- Rock-Solid no chance of movement
- Compatible with **any** waterproofing system
- Easy and fast to tile **no crowning**

"With Oben behind us, we say "yes" to every shower request"

Quality and Service you can rely on



- Established brand since 1923
- High quality products you can trust & depend on
- Design solutions for every shape of shower
- On time deliveries each time every time!
- Hassle-free factory installation service

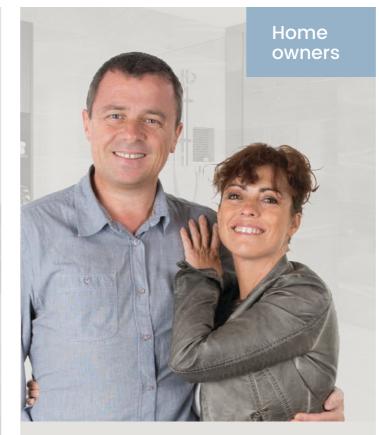

"The whole experience of designing one of the most important areas in our home has been a breeze with Oben"

- Oben brochures makes it easy!
- "Peace of Mind" 25 year Leak Proof Guarantee
- Full range of tile showers Any Shape, Any Size
- Total package Drains, Base and Frameless Glass
- Level Entry design

"Oben, their precision in design and their history in the market says it all!"



- Oben brand totally **dependable** and trustworthy
- Tiled shower solutions for **new** and **renovations**
- Oben offers the ultimate in **versatility** and luxury
- Sleek minimalist designs Function with style
- Oben enables us to **design** any custom shower




Curves create space so Oben created curves

What you do know is that it's bound to be big on luxury like this unique, Walk-In shower made from a single sheet of curved toughened safety glass. The 'J' Walk-In Level Entry is a special feature in any bathroom.

wafer[®] Base J-Walk Options

CORNER J-WALK





Left Hand Base

Right Hand Base

| LENGTH X WIDTH |
|------------------|
| 1250 X 900 - LH |
| 1250 X 900 - RH |
| |
| 1250 X 1000 - LH |

1250 X 1000 - RH

FEATURES - wafer® Base

- Level Entry Design
- Ultra Low 24mm Base
- Does NOT require rebating of joists in order to recess base
- 25 Year Leak Proof Guarantee*
- Left or Right Hand base options
- Polyurethane Adhesive rapid cure system included
- Drain options:
 - 1. "J" Gully Hi Flow Waste
 - 2. Easy Clean Waste

Base Hand must be specified at time of order








wafer® Base Walk-In Options

CORNER RECTANGLE



Centre Outlet

| DEPTH X WIDTH |
|---------------|
| 900 X 1200 |
| 900 X 1300 |
| 900 X 1400 |
| 900 X 1500 |
| 900 X 1600 |
| 900 X 1700 |
| 900 X 1800 |
| 900 X 1900 |
| 900 X 2000 |
| |
| 1000 X 1200 |
| 1000 X 1300 |
| 1000 X 1400 |
| 1000 X 1500 |
| 1000 X 1600 |
| 1000 X 1700 |
| 1000 X 1800 |
| 1000 X 1900 |
| 1000 X 2000 |

FEATURES - wafer[®] Base

- Level Entry Design
- Does NOT require rebating of joists in order to recess base
- 25 Year Leak Proof Guarantee*
- Universal Base Design (No Left or Right Hand)
- Polyurethane Adhesive rapid cure system included
- Drain options:
 - 1. "J" Gully Hi Flow Waste
 - 2. Easy Clean Waste

The ultimate in versatility and luxury

Step into luxury with the new range of Oben Walk-in free standing glass panels which do not require an overhead stabilising bar. The simplicity of a single sheet of toughened glass panel creates a luxurious Walk-In shower in any bathroom, the ease of walking into your shower with no doors to negotiate needs little explanation.

ENCLOSURE - FRAMELESS GLASS



FIXED PANEL

- 10 mm Toughened Safety glass
- Reversible Left and Right Hand
- No stabilizing bar required
- Clear glazing
- Glass Height 1960 (Standard)
- Custom glass height on request
- 15mm adjustment for out of true walls
- Finishes Chrome, Brushed Stainless, Matt Black, White
- Glass Panel Width (Standard) 900, 950, 1000, 1100, 1200




Let yourself be inspired

The latest in minimalistic 10mm glass makes the slide shower an impressive design statement. Extra smooth stainless steel roller technology provides for smooth and effortless door opening and closing action. Minimalistic in appearance, this modern frameless sliding glass enclosure provides that truly "Frameless look" and is the flagship of the Oben shower range.

wafer® Base Rectangular Corner Options

CORNER RECTANGLE




Centre Outlet


| DEPTH X WIDTH |
|---------------|
| 900 X 1200 |
| 900 X 1300 |
| 900 X 1400 |
| 900 X 1500 |
| 900 X 1600 |
| 900 X 1700 |
| 900 X 1800 |
| 900 X 1900 |
| 900 X 2000 |
| |
| 1000 X 1200 |
| 1000 X 1300 |
| 1000 X 1400 |
| 1000 X 1500 |
| 1000 X 1600 |
| 1000 X 1700 |
| 1000 X 1800 |
| 1000 X 1900 |
| 1000 X 2000 |
| |

FEATURES - wafer® Base

- Specifically designed for Timber floors
- Centre Drain Outlet Position
- Precise pre-fabricated slope
- Level Entry Design
- Joists Do NOT require rebating to recess base
- Cementitious Finish
- 100% Waterproof 25 year Guarantee*
- Polyurethane Adhesive rapid cure system included
- Drain options:
 - 1. "J" Gully Hi Flow Waste
 - 2. Easy Clean Waste

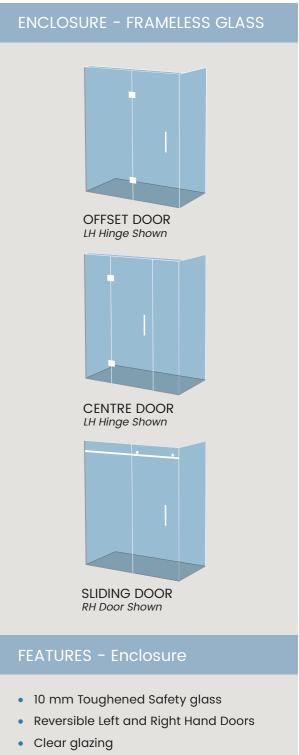

- Glass Height:
 - Hinge Model 1960
 - Glass Overpanel (Standard)
 - Sliding Model 2050
- Custom glass height on request
- 15mm adjustment for out of true walls
- Finishes Chrome, Brushed Stainless, Matt Black, White

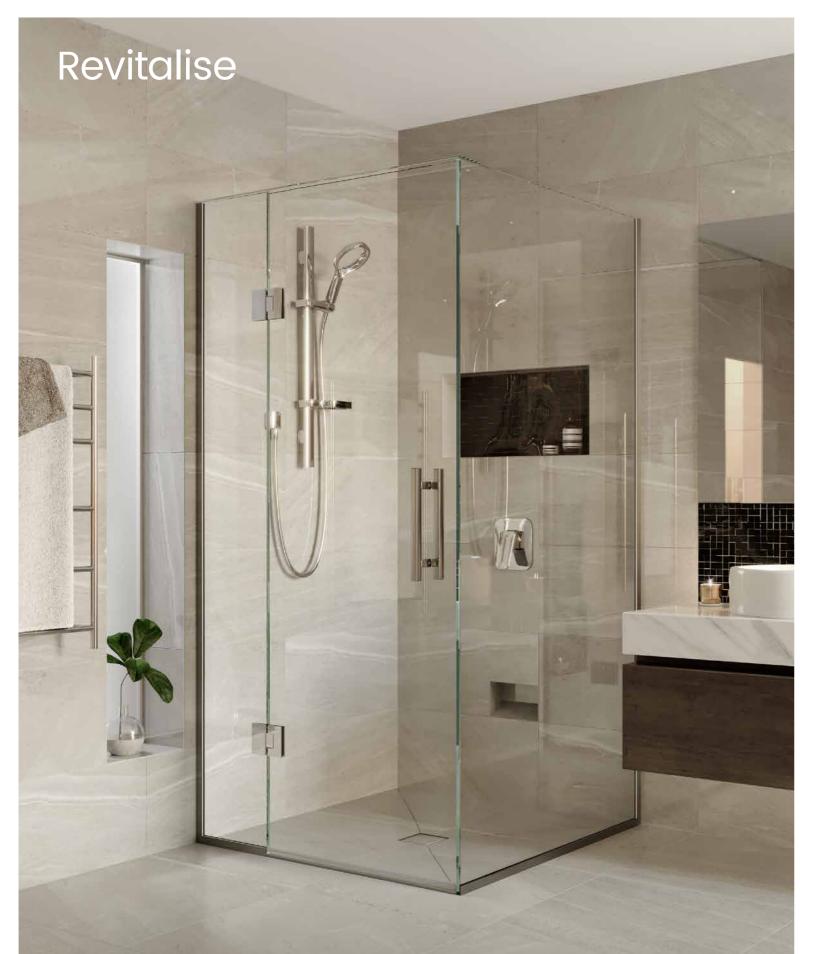

Adding new dimension to space Oben's unique Square Corner features a glass return wall which gives the appearance of added space and light, bringing a whole new dimension to your bathroom. Manufactured from toughened safety glass with a single door available in left or right hand options.

wafer® Base Square Corner Options

CORNER CENTRE OUTLET


Centre Outlet

| DEPTH X WIDT | TH |
|--------------|----|
| 800 X 800 | |
| 850 X 850 | |
| | |
| 900 X 900 | |
| 950 X 950 | |
| | |
| 1000 X 1000 | C |
| 1050 X 1050 | С |
| | |
| 1100 X 1100 | C |
| 1150 X 1150 | С |
| | |
| 1200 X 1200 | C |
| | |


FEATURES - wafer® Base

- Specifically designed for Timber floors
- Centre Drain Outlet Position
- Precise pre-fabricated slope
- Level Entry Design
- Joists Do NOT require rebating to recess base
- Cementitious Finish
- 100% Waterproof 25 year Guarantee*
- Polyurethane Adhesive rapid cure system included
- Drain options:
 - 1. "J" Gully Hi Flow Waste
 - 2. Easy Clean Waste






OFFSET DOOR LH Hinge Shown



CENTRE DOOR LH Hinge Shown

FEATURES - Enclosure

- 10 mm Toughened Safety glass
- Reversible Left and Right Hand Doors
- Frameless Glass Options Centre, Offset or Sliding Door
- Clear glazing
- Glass Height 1960 (Standard)
- Glass Overpanel (Standard)
- Custom glass height on request
- 15mm adjustment for out of true walls
- Finishes Chrome, Matt Black, Brushed Stainless, White.

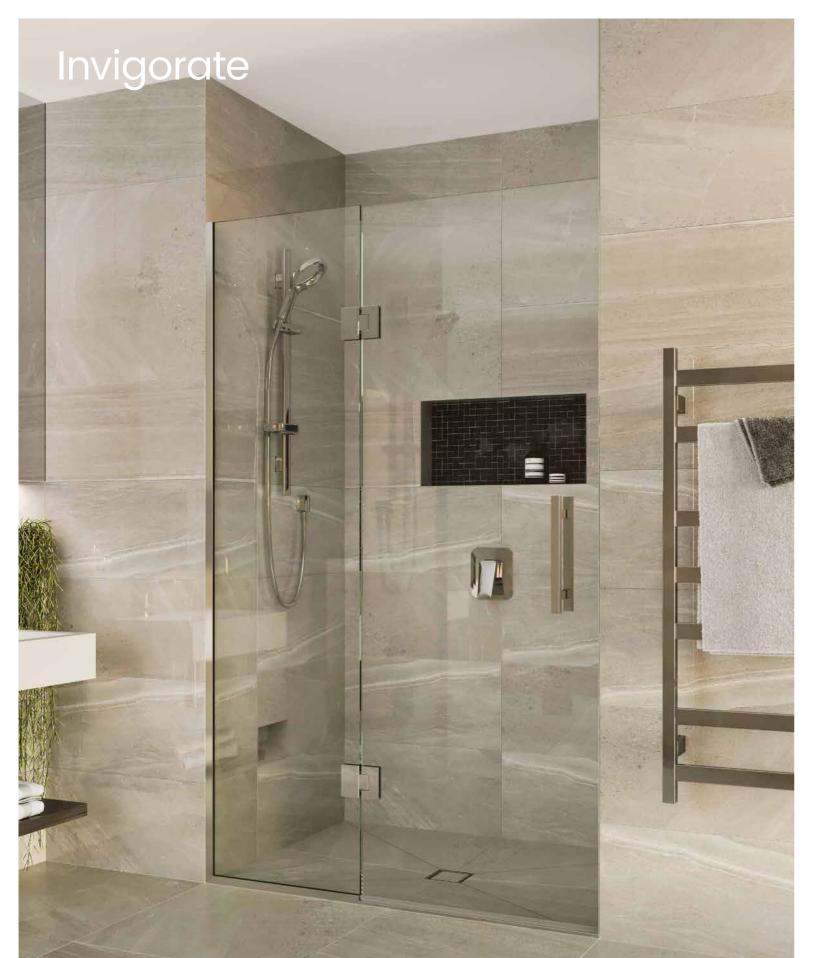

Maximise your bathroom space

Oben's elegant Alcove recessed design not only gives you a great internal showering area, without taking up additional space, it also opens up new design possibilities. A sleek and luxurious recessed shower provides both function and style.

wafer® Base Alcove Options

ALCOVE RECTANGLE



1000 X 1000

900 X 900

900 X 1700

900 X 1800

1000 X 1600 1000 X 1700

1000 X 1800


1000 X 1900

1000 X 2000

Centre Outlet

FEATURES - wafer[®] Base

- Specifically designed for Timber floors
- Precise pre-fabricated slope
- Level Entry Design (Maximum length 2000 mm)
- Joists Do NOT require rebating to recess base
- Cementitious Finish
- 100% Waterproof 25 year Guarantee*
- Universal Base Design (No Left or Right Hand)
- Polyurethane Adhesive rapid cure system included
- Drain options:
 - 1. "J" Gully Hi Flow Waste
 - 2. Easy Clean Waste

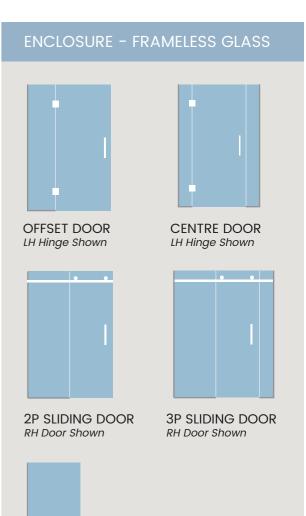

FIXED PANEL LH Panel Shown

- 10 mm Toughened Safety glass
- Reversible Left and Right Hand Doors
- Frameless Glass Options - Centre, Offset or Sliding Door
- Glass Height:
 - Hinge Model 1960
 - Sliding Model 2050
- Custom glass height on request
- 15mm adjustment for out of true walls
- Finishes Chrome, Matt Black, Brushed Stainless, White



wafer® Base Neo-Angle Options

NEO-ANGLE CORNER



Centre Outlet


FEATURES - wafer® Base

- Specifically designed for Timber floors
- Centre Drain Outlet Position
- Precise pre-fabricated slope
- Level Entry Design
- Joists Do NOT require rebating to recess base
- Cementitious Finish
- 100% Waterproof 25 year Guarantee*
- Universal Base Design (No Left or Right Hand)
- Polyurethane Adhesive rapid cure system included
- Drain options:
 - 1. "J" Gully Hi Flow Waste
 - 2. Easy Clean Waste

Where space is a luxury

Oben's practical, space saving Neo Angle corner shower not only maximises space, it also makes the most out of what you can do it a space devoted entirely to indulgence, relaxation and wellbeing. Neo Angle is made from 10mm toughened safety glass and comes with a single door in left or right hand options.

ENCLOSURE - FRAMELESS GLASS



CENTER DOOR LH Hinge Shown

FEATURES - Enclosure

- 10 mm Toughened Safety glass
- Reversible Left and Right Hand Doors
- Frameless Glass Centre Door
- Glass Height 1960 (Standard)
- Glass Overpanel (Standard)
- Custom glass height on request
- 15mm adjustment for out of true walls
- Finishes Chrome, Matt Black, Brushed Stainless, White

Shower niches

When remodelling a bathroom, consider adding a recessed shower niche into your design. It's a practical and streamlined way to add storage space for shampoos, soaps and accessories within your shower wall cavity, without taking away valuable elbow room.

Oben built-in recessed shower niches are a great alternative to chunky glass corner shelves and shower caddies. Available in a wide range of shapes and sizes to suit every installation.





EXTERNAL EDGE FINISHES

A mitred tile edge will give your niche that professional stylish designer look. Ask your tiler to quote mitred edges, which is where the tiles are cut on a 45-degree angle so that the tile edges meet therefore eliminating the necessity for tile trims. Alternatively aluminium tile trim extrusions are available in a range of finishes.





NICHE 600 X 300

Adding a wall niche is a very practical and elegant way to create more storage space in your bathroom. Recessed wall niches enhance your bathroom design and provide a place to conveniently stow all your shampoos, shower gels and other shower items. Available in a range of sizes to match any bathroom style.



NICHE 300 X 300 His 'n' Hers®

wafer®

Accessories as shown not included

What is Glide Glass[®]

THE NON-STICK EASY-CLEAN GLASS

Glide Glass® is proprietary protective nano coating developed by Oben.

A long lasting protective coating for glass showers, making glass easier to clean and maintain like new. Glide Glass reduces cleaning time by repelling lime scale and soap residue deposits from adhering to the glass surface, which results in significantly reduced time and effort for cleaning.

WHAT IS THE DIFFERENCE BETWEEN **TREATED & UNTREATED GLASS**

Glide Glass® treated glass is a two stage polymer chemical reaction which bonds permanently to a glass surface providing an ultra thin protective optically clear nano layer, resistant to soap scum and lime scale deposits caused by hard water, making the surface significantly easier to clean and maintain.

FILLER

Makes glass easier to clean and maintain like new.

- Highly water repellant (Hydrophobic)
- Resistant to Hard water
- Less frequent cleaning
- Reduces mould & bacteria build up

UNTREATED GLASS





Glide Glass[®]

CAP

Keeps your frameless glass shower looking like new!

ike water a duck'

NON-STICK, EASY-CLEAN GLASS

Glide Glass® - Optional Extra, only available for NEW glass installations and must be specified at time of frameless glass shower order.

Average price for Glide Glass® Nano application per shower approximately \$150 - \$350 depending on shower size, includes Consumer Care & Maintenance Kit.

Product Finishes







OBEN PRODUCT WARRANTY SCHEDULE

| CATEGORY | NON COMMERCIAL |
|------------------------------|-----------------------------------|
| Rock-Stone® Shower Bases | 25 Year |
| Rock-Stone® Niches | 25 Year |
| Rock-Stone [®] Hobs | 25 Year |
| Shower Drains | 15 Year (Excludes p finishes*) |
| Showers (Glass & Hardware) | 5 Year |
| Mirrors | 1 Year (Excludes n directly or |
| Shower Seals (Vinyl/PVC) | 1 Year |

*Powder-coated Drains - Matt Black and White drain finishes available on request, but supplied No Warranty. Powder-coated finishes are not suitable for drain installations. Oben recommends Stainless Steel finishes only which is covered by Oben's 15 year warranty. Refer to www.oben.co.nz for further warranty Terms & Conditions.

Note: Surcharge applies to non-standard finishes



Rock-Stone[®] Base Polyceramic

Perfect Solution for Timber Floors





Rock-Stone[®] **Key Features and Benefits**



100% Waterproof



Save up to 50% on installation time



Guaranteed slope angle to drain



Superior strength and impact resistance



Easily installed



Suitable for all tile sizes



Easily cut



Superior thermal insulating qualities

Superior sound insulating qualities

Dimensionally stable

wafer[®] Base Installation

Specifically designed


for timber floors.



Mark outline of base on timber floor.



Cut out 20mm flooring and remove.

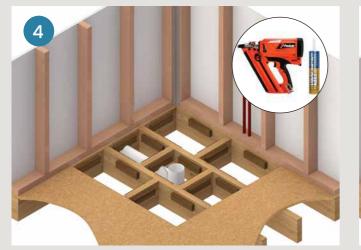


Fix nogs or extra joists where required, to provide support to all edges of the ply infill.




Infill between joists with marine ply or compressed sheet. Glue & screw into position.



Fix Tile & Slate to floor outside shower pan area. Apply Polyurethane adhesive - 2 hour cure time. (Adhesive Kit included)




Fit wafer[®] base and weight down with adhesive pail filled with water.

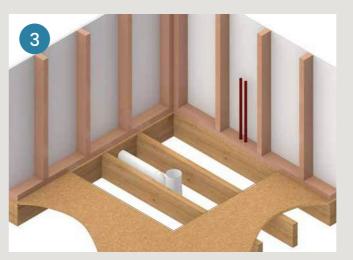

Install plumbing (drain riser, hot and cold water pipes).



Install Gib/Villa board walls ensuring it follows rebate in base profile.

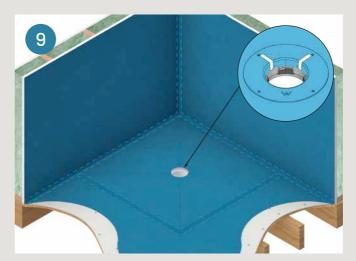


Apply butyl tapes and waterproof floor and walls. Excludes waterproofing - supplied by others.

wafer®

Oben makes it Easy!

A revolution in Level Entry Base Design



- Ultra Low 24mm Profile
- No Joist Rebate required
- Quick and Easy Installation
- Fast 2 hour Adhesive Cure



Traditional Level Entry Installation

- Expensive
- Additional Labour and Materials
- Requires Joists to be Rebated


Recessed Tile Niches - Rough in


Oben Tile Drains






Square







RECESSED NICHE 95MM STUD

| Turne | Madal | Timber Rough-In | | Niche Internal Size (excluds tile | | | |
|----------|------------|-----------------|--------|-----------------------------------|------|-----|--|
| Туре | Model | Width | Height | Depth | Δ | B | |
| oot Rest | | 300 | 250 | 95 | 235 | 185 | |
| quare | 300 X 300 | 400 | 400 | 95 | 335 | 335 | |
| ectangle | 600 X 300 | 700 | 400 | 95 | 635 | 335 | |
| ectangle | 800 X 300 | 900 | 400 | 95 | 835 | 335 | |
| ectangle | 900 X 300 | 1000 | 400 | 95 | 935 | 335 | |
| ectangle | 1000 X 300 | 1100 | 400 | 95 | 1035 | 335 | |
| ectangle | 1200 X 300 | 1300 | 400 | 95 | 1235 | 335 | |
| ectangle | 1500 X 300 | 1600 | 400 | 95 | 1535 | 335 | |

*Also available in 75mm stud depth on request



Rough-In timber framing to support niche - Ref (Niche Rough-In Guide)




Install niche, ensuring front face is flush with front face of Gib/Villa Board.



Fix Gib / Villa Board, dry fit niche, remove and apply adhesive.



Apply Butyl Tapes and waterproof wall and niche.

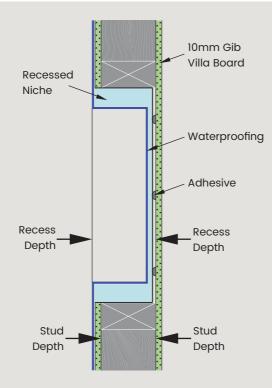





J GULLY HI FLOW TILE DRAIN 100 x 50





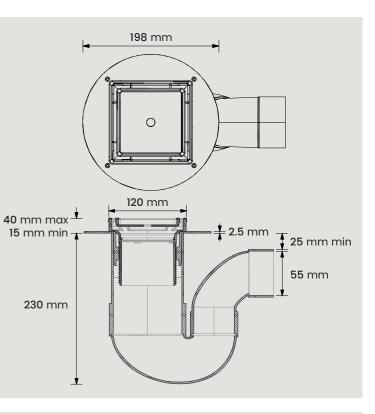

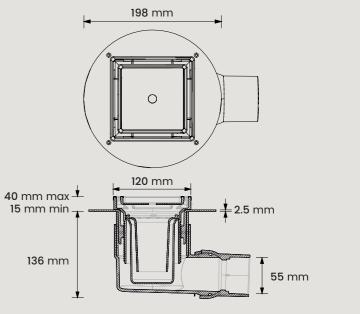

AN INVISIBLE DRAIN SOLUTION

- Oben's NEW tile insert drain eliminates the need for a traditional grate in your shower.
- The tile insert drain cover allows you to create a seamless and almost invisible finish, allowing your shower floor tile choice to become the drain cover.
- A small perimeter slot allows water to drain making the drain virtually invisible.


Base installation easy as 1 2 3


Polyurethane adhesive kit



Floor Substrate

- Plywood
- Timber
- Tile & Slate underlay
- Composed fibre cement sheet










Installing base

3

A perfect fit every time

Measure / Dry fit base



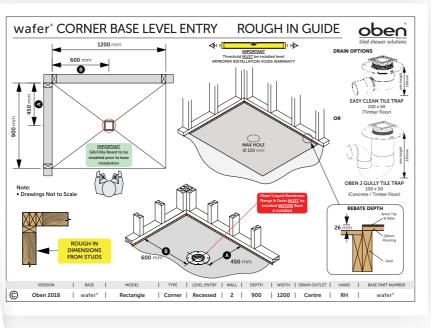

The best guarantee of all

For over 95 years Oben's founders have set their own benchmark of excellence through innovative design, quality products and a passion for service that continues long after purchase.

All Oben products are made from the highestquality materials and assembled only by trained craftsmen. Superior design and function are matched by a level of robustness and durability that is, ultimately, the best guarantee of all.









Gisbourne

Palmerston North



CALL oben.


T: 09 44 33 879 E: sales@oben.co.nz www.oben.co.nz

Order custom size

Custom design

ORDERING YOUR **SHOWER**

Creating your custom size shower is easy with Oben

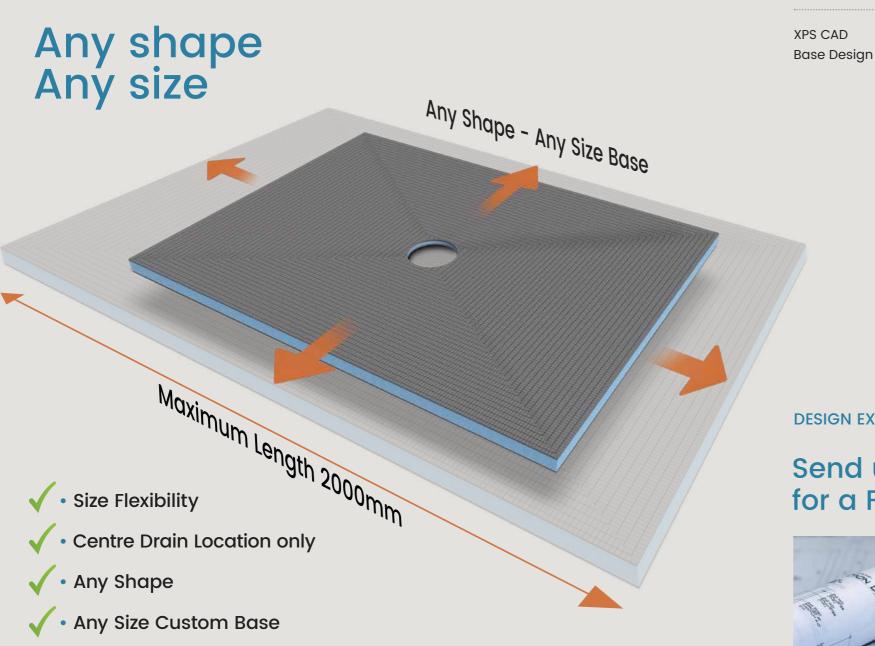

Rock-Stone® Bases are custom made to your exact dimmensions ensuring

A perfect fit every time



DESIGN EXPERTISE KNOW HOW

Send us your plans for a Free Quote



ORDER STEPS

- STEP 1 Call / Email
- STEP 2 Quote
- STEP 3 Design
- STEP 4 Deliver


Rock-Stone® Base Corner Options

ROCK-STONE® BASE AVAILABILTY

Ex Stock Made To Order (5 working days) Glass Availability

| CORNER - CEN | TRE OUTLET | | LEVEL ENTRY | 4 | | | | | |
|------------------|---------------------------------------|-------------|----------------|----------|-------|--------|--------|--------|--------------|
| Corner Square | WIDTH | Cinc | Rock-Sto | ne® Base | Drain | Outlet | Base | Rebate | Associate |
| | | Size | Depth | Width | A | B | Height | | Availability |
| \backslash | | 800 X 800 | 790 | 790 | 405 | 405 | 24 | 26 | |
| | | 850 X 850 | 840 | 840 | 430 | 430 | 24 | 26 | |
| | I I I I I I I I I I I I I I I I I I I | 900 X 900 | 890 | 890 | 455 | 455 | 24 | 26 | |
| | DEPTH | 950 X 950 | 940 | 940 | 480 | 480 | 24 | 26 | |
| | | 1000 X 1000 | 990 | 990 | 505 | 505 | 24 | 26 | |
| | | 1050 X 1050 | 1040 | 1040 | 530 | 530 | 24 | 26 | |
| | — | 1100 X 1100 | 1090 | 1090 | 555 | 555 | 24 | 26 | |
| | | 1150 X 1150 | 1140 | 1140 | 580 | 580 | 24 | 26 | |
| | | 1200 X 1200 | 1190 | 1190 | 605 | 605 | 24 | 26 | |
| | WIDTH | 900 X 1200 | 890 | 1190 | 455 | 605 | 24 | 26 | |
| Corner Rectangle | WIDTH | 900 X 1300 | 890 | 1290 | 455 | 655 | 24 | 26 | |
| | | 900 X 1400 | 890 | 1390 | 455 | 705 | 24 | 26 | |
| | | 900 X 1500 | 890 | 1490 | 455 | 755 | 24 | 26 | |
| | | 900 X 1600 | 890 | 1590 | 455 | 805 | 24 | 26 | |
| | DEPTH | 900 X 1700 | 890 | 1690 | 455 | 855 | 24 | 26 | |
| | ä | 900 X 1800 | 890 | 1790 | 455 | 905 | 24 | 26 | |
| | | 900 X 1900 | 890 | 1890 | 455 | 955 | 30 | 32 | |
| | · · · · · · · · · · · · · · · · · · · | 900 X 2000 | 890 | 1990 | 455 | 1005 | 30 | 32 | |
| | | 1000 X 1200 | 990 | 1190 | 505 | 605 | 24 | 26 | |
| | | 1000 X 1300 | 990 | 1290 | 505 | 655 | 24 | 26 | |
| | | 1000 X 1400 | 990 | 1390 | 505 | 705 | 24 | 26 | |
| | | 1000 X 1500 | 990 | 1490 | 505 | 755 | 24 | 26 | |
| | | 1000 X 1600 | 990 | 1590 | 505 | 805 | 24 | 26 | |
| | | 1000 X 1700 | 990 | 1690 | 505 | 855 | 24 | 26 | |
| | | 1000 X 1800 | 990 | 1790 | 505 | 905 | 24 | 26 | |
| | | 1000 X 1900 | 990 | 1890 | 505 | 955 | 30 | 32 | |
| | | 1000 X 2000 | 990 | 1990 | 505 | 1005 | 30 | 32 | |
| | | 900 X 900 | 890 | 890 | 455 | 455 | 24 | 26 | |
| Corner Neo-Angle | ◄ → | 900 × 900 | 090 | 090 | 400 | 400 | 24 | 20 | |






Corner J-Walk



Left Hand Base



| DEPTH | |
|-------|--|




- A -

| Size Rock-Stone® Base Drain Outlet Base Recess Availability | |
|---|--|
| | |
| Depth Length A B Height Depth Availability | |
| 900 X 1250 890 1240 455 630 24 26 🕒 | |
| 1000 X 1250 990 1240 505 630 24 26 | |


950 X 950 940 940 480 480 24 **26** 1000 X 1000 990 990 505 505 24 **26**

Right Hand Base




| Size | DOOR OFFSET (Reversible) | DOOR CENTRE (REVERSIBLE) | FIXED PANEL (REVERSIBLE) |
|-------------|-----------------------------|-----------------------------|-----------------------------|
| 800 X 800 | | | |
| 850 X 850 | | | |
| 900 X 900 | | | |
| 950 X 950 | | | |
| | | | |
| 1000 X 1000 | | | • |
| 1050 X 1050 | | | • |
| 1100 X 1100 | | | |
| 1150 X 1150 | | | |
| 1200 X 1200 | | | |
| | | | |
| 900 X 1200 | | | |
| 900 X 1300 | | | |
| 900 X 1400 | | | • |
| 900 X 1500 | | | • |
| 900 X 1600 | | | |
| 900 X 1700 | | | |
| 900 X 1800 | | | |
| 900 X 1900 | | | |
| 900 X 2000 | | | |
| 1000 X 1200 | | | |
| 1000 X 1200 | | | |
| | | | |
| 1000 X 1400 | | | |
| 1000 X 1500 | | | |
| 1000 X 1600 | | | |
| 1000 X 1700 | | | |
| 1000 X 1800 | | | |
| 1000 X 1900 | | | |
| 1000 X 2000 | | | |
| | | | |
| 900 X 900 | | | |
| 950 X 950 | | | |
| 1000 X 1000 | | | |
| | | | |

WATER DEFLECTOR




wafer®



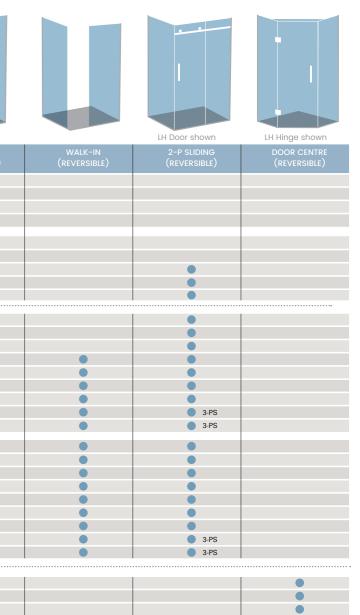

GLASS ADJUSTMENT

Low profile Dam and flexible seal deflect water back into shower



Channel allows glass adjustment for out of square walls (+/- 8 mm)

Rock-Stone® Base Corner Options

ROCK-STONE® BASE AVAILABILTY

ALCOVE - CENTRE OUTLET

800 X 800

850 X 850

900 X 900

790

840

890

Ex Stock Made To Order (5 working days) Glass Availability

A

405

430

880 455 450

780

830

B

400

425

950 X 950 940 930 480 475 24 **26** 1000 X 1000 990 980 505 500 24 **26**

24

24

26

26

24 26


LH Hinge shown

| | LH Hinge shown | LH Hinge shown |
|-------------|-----------------------------|-----------------------------|
| Size | DOOR OFFSET (Reversible) | DOOR CENTRE (Reversible) |
| 800 X 800 | | |
| 850 X 850 | | |
| 900 X 900 | | |
| 950 X 950 | | |
| 1000 X 1000 | • | |

Alcove Rectangle

Alcove Square





Width

Width

- B->


9

Depth


| | LEVEL C | ~>> | | | | | |
|-------------|----------|----------|--------------|------|--------|--------|--------------|
| Size | Rock-Sto | ne® Base | Drain Outlet | | Base | Rebate | Availability |
| | Depth | Width | А | В | Height | Depth | Availability |
| 900 X 1200 | 890 | 1180 | 455 | 600 | 24 | 26 | |
| 900 X 1300 | 890 | 1280 | 455 | 650 | 24 | 26 | |
| 900 X 1400 | 890 | 1380 | 455 | 700 | 24 | 26 | |
| 900 X 1500 | 890 | 1480 | 455 | 750 | 24 | 26 | |
| 900 X 1600 | 890 | 1580 | 455 | 800 | 24 | 26 | |
| 900 X 1700 | 890 | 1680 | 455 | 850 | 24 | 26 | |
| 900 X 1800 | 890 | 1780 | 455 | 900 | 24 | 26 | |
| 900 X 1900 | 890 | 1880 | 455 | 950 | 30 | 32 | |
| 900 X 2000 | 890 | 1980 | 455 | 1000 | 30 | 32 | |
| | | | | | | | |
| 1000 X 1200 | 990 | 1180 | 505 | 600 | 24 | 26 | |
| 1000 X 1300 | 990 | 1280 | 505 | 650 | 24 | 26 | |
| 1000 X 1400 | 990 | 1380 | 505 | 700 | 24 | 26 | |
| 1000 X 1500 | 990 | 1480 | 505 | 750 | 24 | 26 | |
| 1000 X 1600 | 990 | 1580 | 505 | 800 | 24 | 26 | |
| 1000 X 1700 | 990 | 1680 | 505 | 850 | 24 | 26 | |
| 1000 X 1800 | 990 | 1780 | 505 | 900 | 24 | 26 | |
| 1000 X 1900 | 990 | 1880 | 505 | 950 | 30 | 32 | |
| 1000 X 2000 | 990 | 1980 | 505 | 1000 | 30 | 32 | |


| 900 X 1200 | | |
|-------------|--|--|
| 900 X 1300 | | |
| 900 X 1400 | | |
| 900 X 1500 | | |
| 900 X 1600 | | |
| 900 X 1700 | | |
| 900 X 1800 | | |
| 900 X 1900 | | |
| 900 X 2000 | | |
| | | |
| 1000 X 1200 | | |
| 1000 X 1300 | | |
| 1000 X 1400 | | |
| 1000 X 1500 | | |
| 1000 X 1600 | | |
| 1000 X 1700 | | |
| 1000 X 1800 | | |
| 1000 X 1900 | | |
| 1000 X 2000 | | |
| | | |

ROUGH-IN SPECIFICATIONS

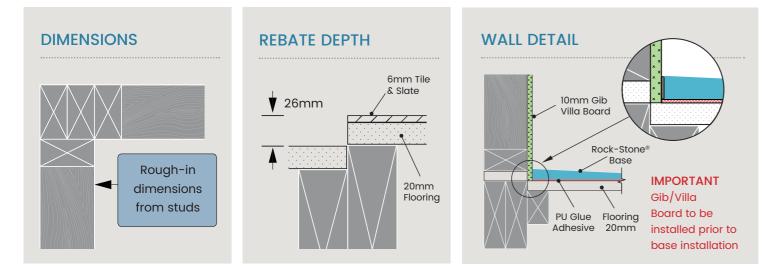

TIMBER FLOOR DETAIL 800>1800mm






| | RH Door shown |
|-----------------------------|-----------------------------|
| FIXED PANEL (Reversible) | 2-P SLIDING (Reversible) |
| | |
| | |
| | |
| | |
| | |

| | • |
|--|------|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | 3-PS |
| | 3-PS |
| | |

TIMBER FLOOR DETAIL 1800>2000*mm




*IMPORTANT

Wafer® Bases greater than 1800>2000 length (MAX) will require additional 6mm floor height.

wafer® FAQ's

SHOWER MIXER POSITION?


With today's Walk-In showers becoming larger and more popular than ever it is important that the mixer position be considered so the bather can adjust temperature during showering. After the first minute of showering the body's skin receptors become acclimatised to the original temperature set and requires an incremental increase of 1°C every minute over a twominute period to eliminate any body cooling effect.

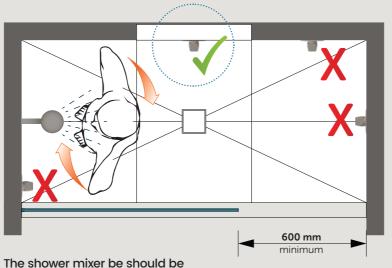

positioned where the bather can easily reach the mixer to adjust water temperature during showering.




If specifying a recessed shower niche, then you will need to ensure your plumber installs the shower mixer to the recommended height of **1000 mm** off the sub floor allowing sufficient clearance between mixer elbow and niche nog support.

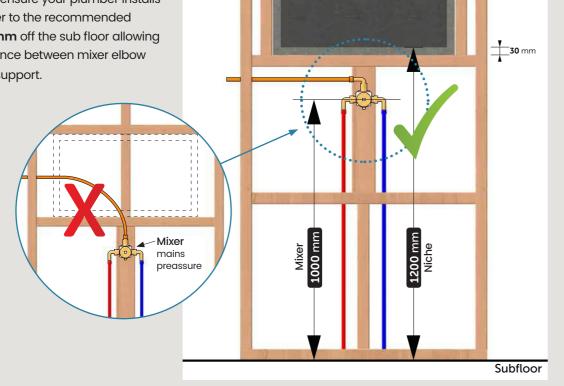

SHOWER NICHE HEIGHT CALCULATION - Wafer Base (Level Entry)

Oben recommends internal niche shelf height is set at **1200 mm off sub floor.** This allows for a 20 mm safety buffer which can be used to raise the niche shelf tile height junction to match the finished wall tile height. Ask your builder to consult with your tiler regarding your actual shower recess height required as this may vary depending on actual tile size selection, grout joints and tiled floor levels. Tiles are a nominal size and can vary from actual size advertised. Example 600 X 600 tile may be only 595 X 595.

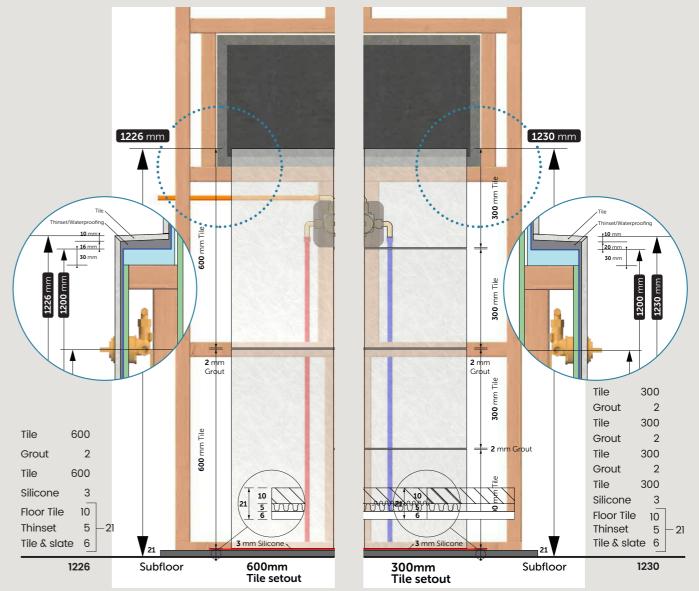

*IMPORTANT

Above Niche height recommendations are **not suitable for Elusion** channel drain base models as Niche heights vary between models – Please refer to Elusion Brochure

IMPORTANT.

Tile layout dimensions and drawings provided are to be used as a "<u>GUIDE ONLY</u>" and actual niche height must be specified by a tiler in conjunction with your builder in order to determine the niche height required to suit your wall tile selection.

More Oben brochures



<text>

Oben 10.B Parity Place Hillcrest Auckland 0627

T 09 44 33 879 E sales@oben.co.nz W www.oben.co.nz Oben reserves all rights to alter designs and specification without notice. All dimensions given are approximate and should be checked prior to installation. Products shown in Catalogues, Order Forms and digital format are subject to Intellectual Property Protection. NZ and International Patents Pending, ® Registered Trademarks of Oben. Oben's continuous product improvement policy means some product enhancements may not be available at time of order placement due to current stock and phasing in/out of new models.

Quotations valid 30 days from date of quote. Prices subject to re quote after expiry of 30 days. Prices quoted are subject to final site measure. (Contact Oben Customer Service for further details.) Tapware & Accessories featured in photography are not included.



All products available Ex Oben warehouse Auckland and do not include shipping & handling costs which will be charged separately on invoices. Custom made to order products are Non-Refundable.

© Oben wafer® Brochure April 2019